




→ THE NO NONSENSE PLY ←





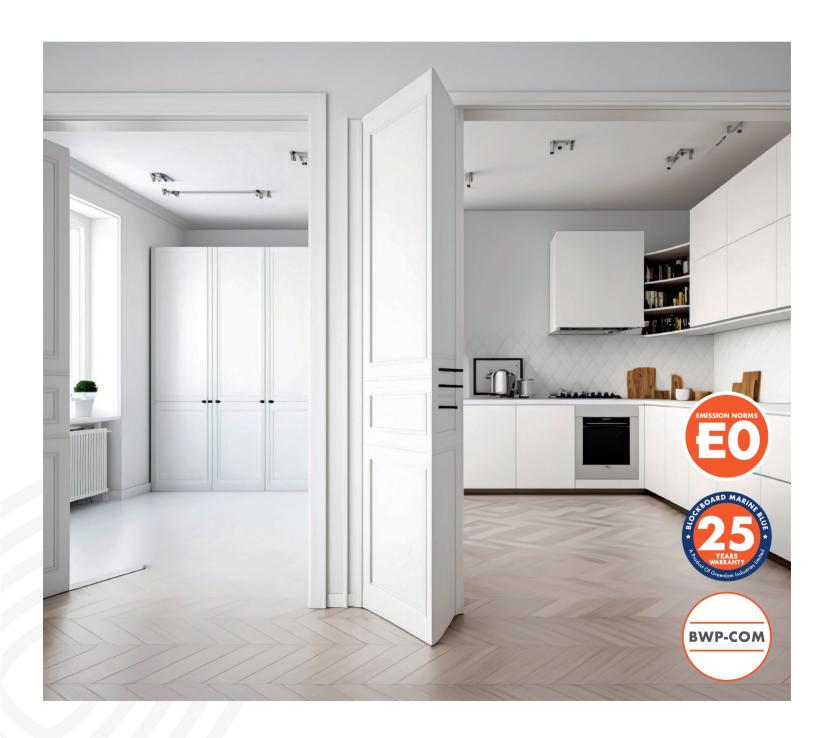



Blockboard Marine Blue is waterproof and made from preservative-treated wood with a 0.3 mm thicker face veneer. It meets the EO emission standard and includes fire safety features. Resistant to insects and microorganisms, it's ideal for shutters, shelves, sliding doors, and wall panels. Offering exceptional quality and reliability for all your interior solutions.

## **TECHNICAL SPECIFICATION**

| Thickness in mm  | 19                     | 25   |  |
|--|------------------------|--|--|
| Fire Safety  | Yes                    | Yes  |  |
| Veneer Treatment   |                        | Each veneer is preservative treated with Vacuum Pressure Technology  |  |
| Density approx. in kg per CBM  | 560                    | 560  |  |
| Impact Resistance  | High strength & dimens | High strength & dimensional stability                                |  |
| Screw Holding Strength (kg)  | >165                   | >165   |  |
| Nail Holding Strength (kg)   | >75                    | >75  |  |
| Quad-Core Press  | Yes                    | Yes  |  |
| Adhesives of Plies Glue Shear Strength (N) Visual Inspection                           | NA<br>Excellent        |  |  |
| 100% Composed Veneer   |                        | All layers are pre-composed in an automatic state-of-the-art machine |  |
| Moisture Content (%)   | 8 -12                  | 8 -12  |  |
| Specific Gravity (g/cc)  | 0.56                   | 0.56   |  |
| Water Absorption (%)   | ≤5                     | ≤5   |  |
| Static Bending Strength (N/mm2) Modulus of Rupture (MOR): Modulus of Elasticity (MOE): | >50<br>>5000           |  |  |
| Adhesive   | Phenolic adhesive      | Phenolic adhesive  |  |
| Emission Norms   | EO                     | EO   |  |
| Calibration  | 100% with Precision Co | 100% with Precision Calibration Technology                           |  |

E-mail: info@mikasaply.com | Website: www.greenlamindustries.com | Toll-Free No.: 1800 833 0004